



FS-DR-*** / ***

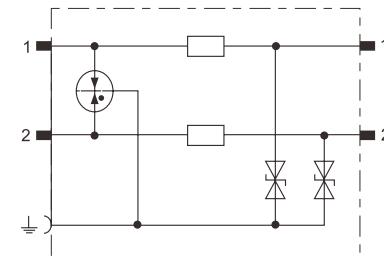

- ◆ Din rail signal surge protective device are applied to control signal double wire circuit in LPZ0 to LPZ3, e.g. 4~20mA circuit, RS485 circuit, RS422 circuit, gas detector, car-park system, CCTV remote monitor, remote control circuits.
- ◆ Common and difference surge protection mode, excellent performance.
- ◆ The pluggable module allows a fast replacement in case of fail.
- ◆ The grounding is realized through an earthing-clip on the DIN-Rail and / or earthing – clamp.
- ◆ No limiting in operating current due to parallel connecting method.
- ◆ Mounting on 35mm Rail, small space.

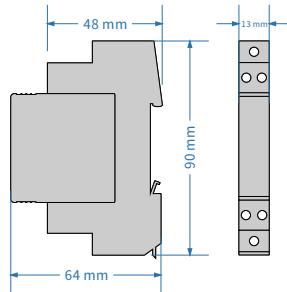

Model No.	FS-DR-5/1.6	FS-DR-12/2.9	FS-DR-15/4.1	FS-DR-24/5.6	FS-DR-30/7.0	FS-DR-48/9.3	FS-DR-60/10.0
Type of Network	Signal transmission system						
Nominal voltage 50(60)Hz U_N	5.0V	12.0V	15.0V	24.0V	30.0V	48.0V	60.0V
Rated Voltage (DC Max. Cont. Operating Voltage) U_c	6.0V	14.5V	17.8V	26.8V	34.8V	55.1V	70.1V
Rated Voltage (AC Max. Cont. Operating Voltage) U_c	4.2V	10.2V	12.5V	18.9V	24.5V	38.9V	49.0V
Rated current I_L	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A	0.5A
Nominal discharge current (8/20μs) I_n	5.0kA	5.0kA	5.0kA	5.0kA	5.0kA	5.0kA	5.0kA
Voltage protective level ($I_{imp}D1$) U_p	L-L	≤50V	≤70V	≤85V	≤100V	≤130V	≤200V
	L-PE	≤45V	≤60V	≤70V	≤80V	≤80V	≤120V
Voltage protective level (1kV/μsC3) U_p	L-L	≤16V	≤38V	≤50V	≤70V	≤95V	≤150V
	L-PE	≤8V	≤19V	≤25V	≤35V	≤50V	≤75V
Each line series resistance	1.0Ω	1.5Ω	1.8Ω	1.8Ω	1.8Ω	1.8Ω	1.8Ω
Band width	L-L	1.6MHz	2.9MHz	4.1MHz	5.6MHz	7.0MHz	9.3MHz
Capacitance	L-L	≤3.0nF	≤1.0nF	≤0.9nF	≤0.7nF	≤0.6nF	≤0.3nF
	L-PE	≤5.0nF	≤2.0nF	≤1.8nF	≤1.3nF	≤1.1nF	≤0.6nF
I/O Connections	Multi core wire: 0.5mm²~2.5mm²						
Mounting	35mm Symmetrical rail (EN50022/DIN46277-3)						
Response time t_A	≤10ns						
Operation temperature range / humidity / altitude	-40°C~+80°C / 30%~90% / 3000m						
Housing material	UL94 V-0						
Degree of protection	IP20						