


## 1. Technical parameters

Model No.	FLRC-S/II
Minimum current sensitivity (rise time $\geq 8\mu\text{s}$ )	>350A
Maximum detectable current	100kA
Sequence of impulse	> 1s
Display model	Electromechanical counter
Indicator	Lightning event 0~999999
Current sample mode	Inductive probe (Built-in)
Working mode	No battery / No power supply needed
Operation temperature	-20°C~+70°C
Dimension of installation window	30mm
Dimension of counter	110x33x82mm
Enclosure material	Metal plate
Net weight	0.46kg

## 2. Basic Structure Drawing

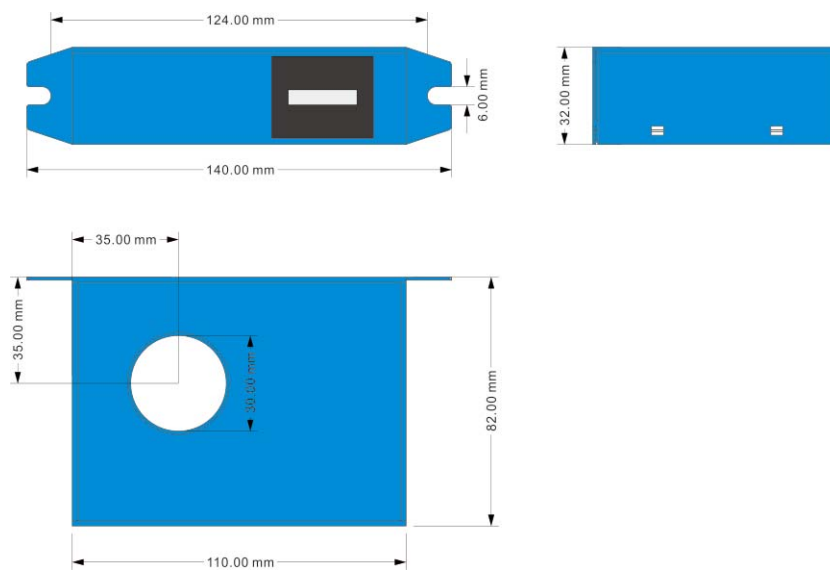

## 3. Installation

