


## Lightning Counter

### Model No.: FLRC-S/R





- Electromechanical lightning counter.
- 4 digits display (0~9999)
- With reset function by press a button to clear the number to "0"
- No need battery / power supply.
- Metal plate. Easy installation and use.
- Installation window --- 30mm.
- Sensitive response and wide lightning current measuring range.
- Can be used with all kinds of lightning and surge protectors and equipment.

### 1. Dimension

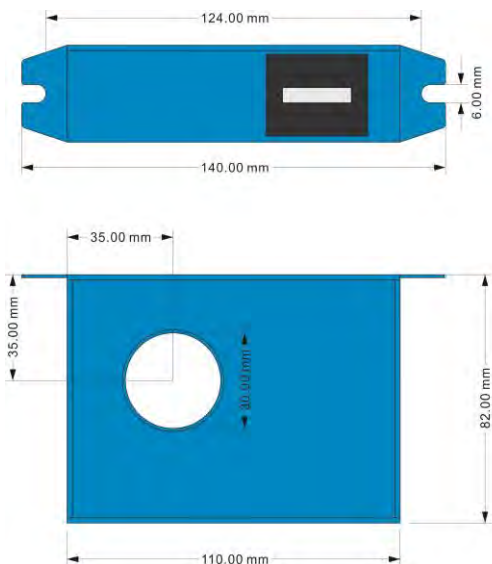

### 2. Installation

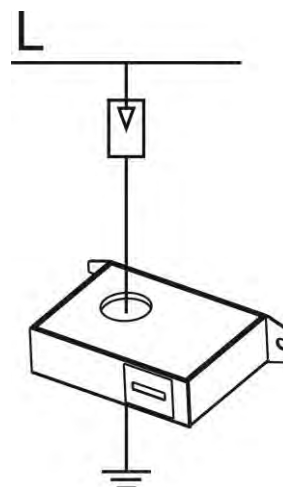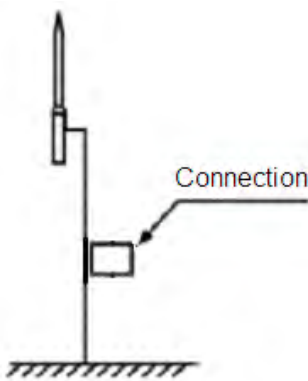

### FATECH ELECTRONIC (FOSHAN) CO., LTD.

Add: Bldg D7, Guangdong New Light Production Base, Luocun, Shishan Town, Nanhai District, Foshan City, Guangdong China.

Tel: +86 757 86718031 Fax: +86 757 83557686

Web: [www.fatech-surge-protection.com](http://www.fatech-surge-protection.com), [www.fatech-spdcn.com](http://www.fatech-spdcn.com)

Email: [sales@fatech-surge-protection.com](mailto:sales@fatech-surge-protection.com), [sales@fatech-spdcn.com](mailto:sales@fatech-spdcn.com)

### 3. Electrical parameter

<b>Model No.</b>	FLRC-S/R
<b>Minimum Current Sensitivity (rise time <math>\geq 8\mu\text{s}</math>)</b>	>350A
<b>Maximum Detectable Current (Imax)</b>	100kA
<b>Sequence of impulse</b>	> 1s
<b>Display Model</b>	Electromechanical Counter
<b>Indicator</b>	Lightning Event 0~9999
<b>Reset function</b>	Press one button to clear display number to "0"
<b>Current Sample Mode</b>	Inductive Probe (Built-in)
<b>Working mode</b>	No battery / No power supply needed
<b>Operation temperature (°C)</b>	-20~+70
<b>Dimension of installation window (mm)</b>	30mm
<b>Dimension of counter (mm)</b>	110x33x82
<b>Enclosure material</b>	Metal plate
<b>Net Weight</b>	0.46kg

### FATECH ELECTRONIC (FOSHAN) CO., LTD.

Add: Bldg D7, Guangdong New Light Production Base, Luocun, Shishan Town, Nanhai District, Foshan City, Guangdong China.

Tel: +86 757 86718031 Fax: +86 757 83557686

Web: [www.fatech-surge-protection.com](http://www.fatech-surge-protection.com), [www.fatech-spd.cn](http://www.fatech-spd.cn)

Email: [sales@fatech-surge-protection.com](mailto:sales@fatech-surge-protection.com), [sales@fatech-spd.cn](mailto:sales@fatech-spd.cn)